## 385-376 SUMMIT<sup>®</sup> PRO

# 

Elongated Front, SmartHeight™, Vitreous China, 10' Rough-In, Two-Piece Toilet

### **FEATURES**

- High performance MagnaFlush<sup>™</sup> flushing technology
- 1.6 gpf / 6.0 lpf
- · Elongated front, SmartHeight<sup>™</sup> bowl (ADA compliant)
- SmartFasten<sup>™</sup> 3-bolt tank-to-bowl connection
- PuraClean<sup>®</sup> easy-to-clean glaze
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- Fluidmaster<sup>®</sup> pilot operated anti-siphon fill valve
- 10' rough-in
- Model 59 color match, metal trip lever
- · 2' glazed trapway
- · The Mansfield<sup>®</sup> limited lifetime warranty on china, Five-year limited warranty on tank trim
- Available in White

MODEL #	DESCRIPTION	CODES/STANDARDS
385-376	Elongated front, SmartHeight™, two-piece toilet. Less toilet seat and supply.	
385	Elongated front, SmartHeight™ toilet bowl only. Less supply.	LEC E
376	Tank and cover only, with left hand, front-mount, color match, metal trip lever. Less supply.	C V (8) ADA COMPLIANT
TANK TRIM & R	EPLACEMENT PARTS	
59	Trip lever - color match, metal trip lever, left hand	
2037-1212	Summit® 1.6 rigid flapper flush valve	
400A	Fluidmaster® pilot anti-siphon fill valve	
2206	Pilot operated fill valve	
630-0030	Replacement flush valve seal	
386-LID	Tank lid	





## 385-376 SUMMIT® PRO

# 


Elongated Front, SmartHeight<sup>™</sup>, Vitreous China, 10<sup>•</sup> Rough-In, Two-Piece Toilet

### **SPECIFICATIONS**

MODEL #	DESCRIPTION	CODES/STANDARDS
385-376	Elongated front, SmartHeight™ (1.6 gpf/6.0 lpf) two-piece toilet	

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	9' X 10'
ROUGH-IN	10'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 385 - 54 lbs. (24.4 kg) Model 376 - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

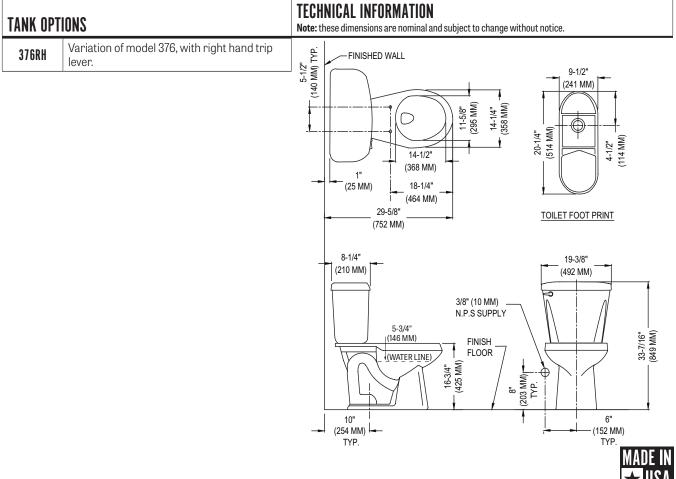

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.