

Models 6039/6539

PRO-FIT® 6060

Corner Whirlpool or Bathtub



Features





- 59-3/4" x 59-3/4" x 21-1/4" Corner whirlpool or bathtub
- Side-by-side seating for two
- Six powerful Ultra-Swirl jets
- Dual air knobs for total jet control
- Limited One-Year Warranty
- Available in Standard Colors: white, almond, biscuit and bone



Model 6039
(Shown with trim upgrade and Lift and Turn drain)



Options

Lift and Turn Drain

Model #	Description		Model #	Description	
PF1320	Polished Chrome		SWAP00	Nailing flange kit	
PF1321	Everbrass (PVD)		SWP150	Factory installed nailing flange	
PF1322	Brushed Nickel		PF1328	Removable corner apron	
PF1323	Oil Rubbed Bronze				

Whirlpool Options

Metal Trim

Model #	Description		Model #	Description	
PF1335	Polished Chrome		SWP151	In-line Water Heater	
PF1336	Everbrass (PVD)				
PF1337	Brushed Nickel				
PF1338	Oil Rubbed Bronze				



MADE IN USA




Models 6039/6539

PRO-FIT® 6060

Corner Whirlpool or Bathtub





Specifications


Model #	Description	Codes/Standards
6039	59-3/4" x 59-3/4" x 21-1/4" Corner Whirlpool	  
6539	59-3/4" x 59-3/4" x 21-1/4" Corner Bathtub	

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	6
Construction	Self-contained, pre-plumbed air massage bath, mounted on a pre-leveled base	Water Capacity	60 gal. (min.) / 85 gal. (max.)
Blower Motor	120V, 60HZ, 5.8 Amp, Single Speed, Single Phase-Pre-mounted	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m ²)
Electrical Requirements	120V, 15 Amp, GFCI protected circuits	Shipping Weight	whirlpool - 167 lbs. bathtub - 137 lbs.
On/Off Control	Air Switch	Warranty	Limited One Year

Technical Information

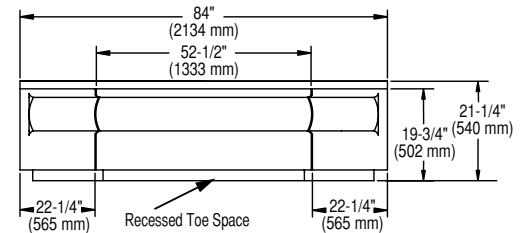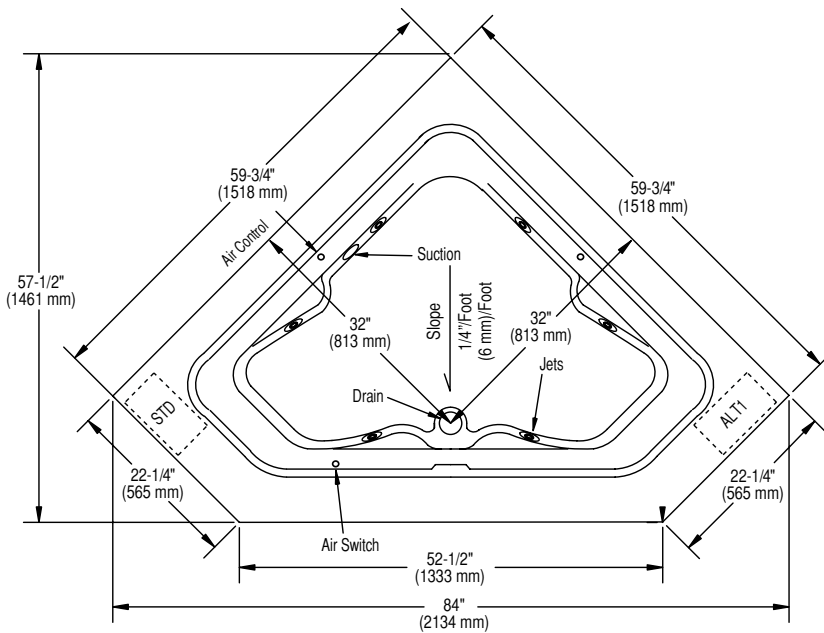

Optional Removable Apron

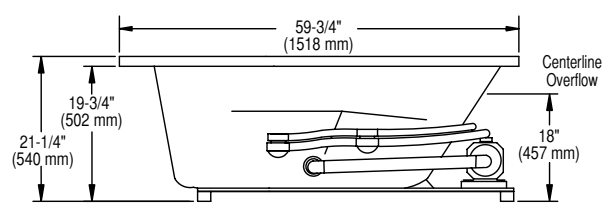

Pump locations are shown for clarity. STD-standard pump location. ALT1 - alternate pump location.

Notes: If a factory installed nailing flange added to a unit, add 1/8" to each side flanged.

Measurements may vary 1/4" (+/-)

Install this product according to the installation guide.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.



MADE IN USA