

### Features

- For use with a handshower and hose (sold separately).
- Coordinates with Awaken showerheads, handshowers and showering accessories.

### Material

- Metal construction.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Easy installation using slip-fit connection.
- Wall-mount.
- Includes 1218069 supply adapter.
- May require other adapter based on installation type (sold separately).

### Adapters, Rough-in and Extension Kits

|         |   |
|---------|---|
| 1229031 | Range: 0" (0 mm) - 1/2" (13 mm)           |
| 1247986 | Range: 5/16" (8 mm) - 13/16" (21 mm)      |
| 1247985 | Range: 13/16" (21 mm) - 1-5/16" (33 mm)   |
| 1247984 | Range: 1-5/16" (33 mm) - 1-13/16" (46 mm) |
| 1218070 | Range: 2-5/16" (59 mm) - 2-13/16" (71 mm) |
| 1218071 | Range: 2-13/16" (71 mm) - 3-5/16" (84 mm) |
| 1218069 | Range: 1-13/16" (46 mm) - 2-5/16" (59 mm) |



### Codes/Standards




ASME A112.18.1/CSA B125.1

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description             |
|--|------|-------------------------|
|  | CP   | Polished Chrome         |
|  | BN   | Vibrant® Brushed Nickel |
|  | 2BZ  | Oil-Rubbed Bronze       |

| Supply Adapter     | A                                  |
|--------------------|------------------------------------|
| 1218069 (included) | 1-13/16" – 2-5/16" (46 mm – 59 mm) |
| 1229031*           | 0 – 1/2" (0 – 13 mm)               |
| 1247986*           | 5/16" – 13/16" (8 mm – 21 mm)      |
| 1247985*           | 13/16" – 1-5/16" (21 mm – 33 mm)   |
| 1247984*           | 1-5/16" – 1-13/16" (33 mm – 46 mm) |
| 1218070*           | 2-5/16" – 2-13/16" (59 mm – 71 mm) |
| 1218071*           | 2-13/16" – 3-5/16" (71 mm – 84 mm) |

\*Sold Separately

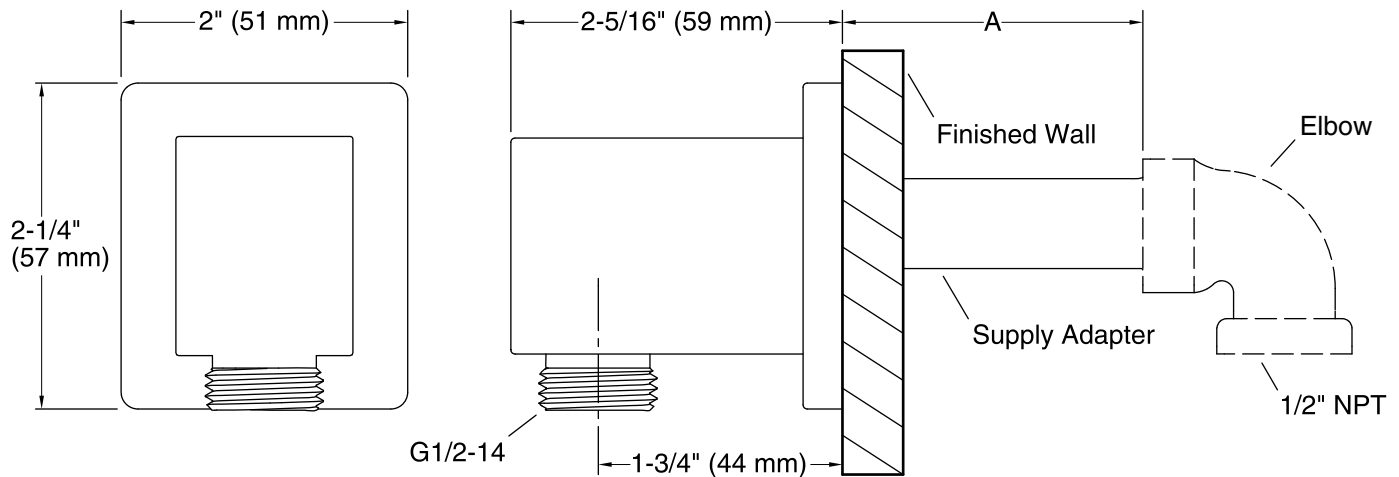

### Technical Information

All product dimensions are nominal.

### Notes

Install this product according to the installation guide.

If dimension "A" is between 1-13/16" (46 mm) and 2-5/16" (59 mm) use the included supply adapter. For the other dimensions, order the appropriate supply adapter.